



**WI-PS510V**  
**10-Port 48V 100Mbps**  
**VoIP PoE Switch with 8-Port PoE**  
**Data sheet**


## Highlights

- 10 100Mbps Ports with 8 PoE ports
- Supports PoE power up to 30W for each port
- Supports PoE IEEE 802.3af/at compliant PDs
- Internal power adapter supply 65W
- Port VLAN function prevent voice data obstruct
- Qos for Voice with smoother VoIP data transmission
- Support 250meter Long-Range PoE Transmission

## Product



## Typical Applications

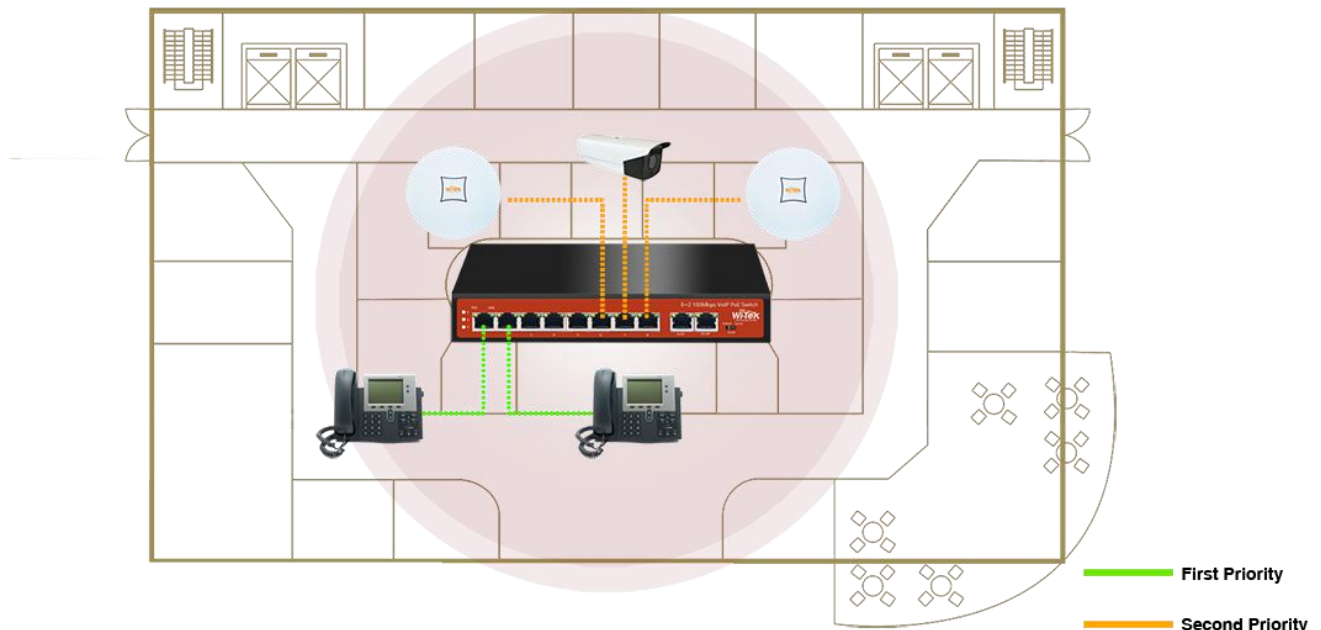


# Support below brand VOIP PHONE

Yealink




Fanvil

3CX

## Standard PoE Mode

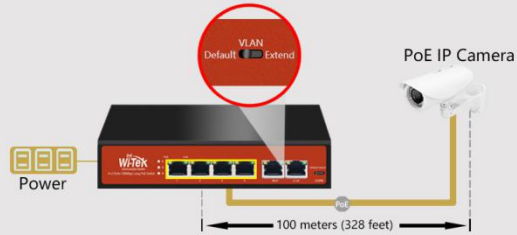

## Extend PoE Mode

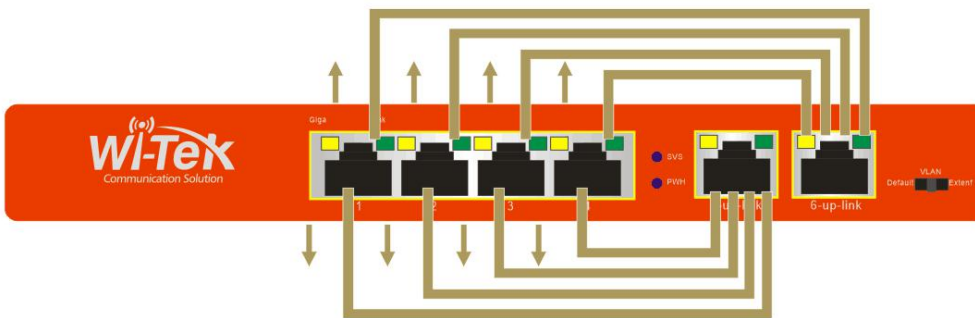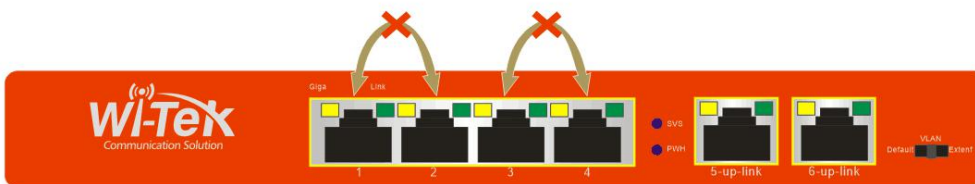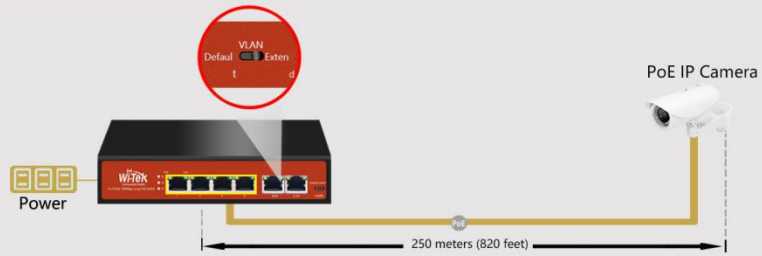

## Description

### what this product does

WI-PS510V is a 10-port 10/100Mbps unmanaged switch design for SMB VoIP application that requires no configuration and provides 8 PoE ports. The switch provides an easy way to expand your wired network. All 10 ports support auto-MDI/MDIX, eliminating the need to worry about the type of cable to use. Featuring full duplex mode, the WI-PS510V can process data at a rate of up to 200Mbps making it an ideal choice for expanding your high performance wired network. Its Port VLAN and fixed Qos for Voice can make smooth transmit VOIP data. Based on Port priority: define 2 level group ports to keep VoIP ports high priority transfer, Leve-1 Ports group is Ports1-4 and 2 uplink ports, Leve-2 Ports group is Ports5-8, so you can connect VoIP phone to Port 1-4 for keep fastest data transmit to uplink ports

### High Performance

WI-PS510V Fast Ethernet Switch provides 9 10/100Mbps Auto-Negotiation RJ45 ports. All ports support Auto MDI/MDIX function, eliminating the need for crossover cables or Uplink ports. Featuring non-blocking switching architecture, WI-PS510V forwards and filters packets at full wire-speed for maximum throughput. And IEEE 802.3x flow control for Full Duplex mode and back-pressure for Half Duplex mode alleviate the traffic congestion and make WI-PS510V work reliably.

### Easy to Use

The auto features of this Ethernet switch make installation plug and play and hassle-free. No configuring is required. Auto MDI/MDIX eliminates the need for crossover cables. Auto-negotiation on each port senses the link speed of a network device (10,

100 Mbps) and intelligently adjusts for compatibility and optimal performance.

## Specification

HARDWARE FEATURES	
<b>Interface</b>	10 10/100Mbps RJ45 Ports
<b>Network Media</b>	10/100BASE-TX: UTP category 5 or better (maximum 100m)
<b>Fan Quantity</b>	Fanless
<b>Power Consumption</b>	65W (max. with PoE device connected)
<b>External Power Supply</b>	Internal Power Adapter(Output: DC52V 1.25A)
<b>PoE Ports (RJ45)</b>	Standard: 802.3 af/at compliant PoE Ports: Port1- Port8
<b>Backbound Bandwidth</b>	2Gbps
<b>Mac Address Table</b>	4K
<b>Packet Forwarding Rate</b>	1.5Mpps
<b>Buffer</b>	768Kbps

<b>Jumbo Frame</b>	10240B
<b>Dimensions</b>	197*75*30 mm(L*W*H)

SOFTWARE FEATURES	
<b>QoS</b>	Based on Port priority
<b>VLAN</b>	Ports VLAN(Port isolation)
<b>Transmission Method</b>	Store-And-Forward
<b>Advanced Functions</b>	Priority Function Mac Address Auto-Learning And Auto-Aging Store and forward IEEE 802.3x flow control for Full-duplex Mode Backpressure for Half-duplex Mode

OTHERS	
<b>Certification</b>	CE, FCC, RoHS
<b>Package Contents</b>	POE Switch Electric Line Guide Book/Warranty Card

**Environment**

Operating Temperature:  
-10°C~55°C