

Auxiliary RGB Strobe Kit

for CyberData IP Endpoints

The CyberData Auxiliary RGB Strobe Kit is a cost-effective, user-installable option for the latest line of CyberData VoIP products.

The Auxiliary RGB Strobe Kit comes with a 1-meter cable that enables the user to connect to a supported CyberData IP endpoint.

Power and signaling for the strobe comes from the attached CyberData Endpoint.

Setup of the strobe's blink rates and brightness are through the web interface of the attached CyberData IP endpoint.

Features

- 3.28 feet [1 meter] cable
- Meets ADA requirements for telephony signaling and notification
- Different Strobe colors, blink rate and brightness can be tied to multiple activation scenes
- Activates from a CyberData IP endpoint
- Mailbox Message Waiting Indication
- Multicast activation
- Web-based setup
- Support for Singlewire products

Use areas include:


- Sales and support mailbox indication
- Classrooms
- Banks or financial institutions
- Court rooms
- Manufacturing warehouses
- Office

Supported Products by serial number going forward:

- SIP Paging Amplifier
- SIP Loudspeaker Amplifier
- Singlewire Loudspeaker Amplifier
- Singlewire Paging Amplifier
- SIP Speaker
- Singlewire Speaker
- Office Ringer SIP and Singlewire
- Indoor Intercom SIP and Singlewire
- Emergency Intercom SIP and Singlewire
- SIP Call Button

CyberData


The IP Endpoint Company

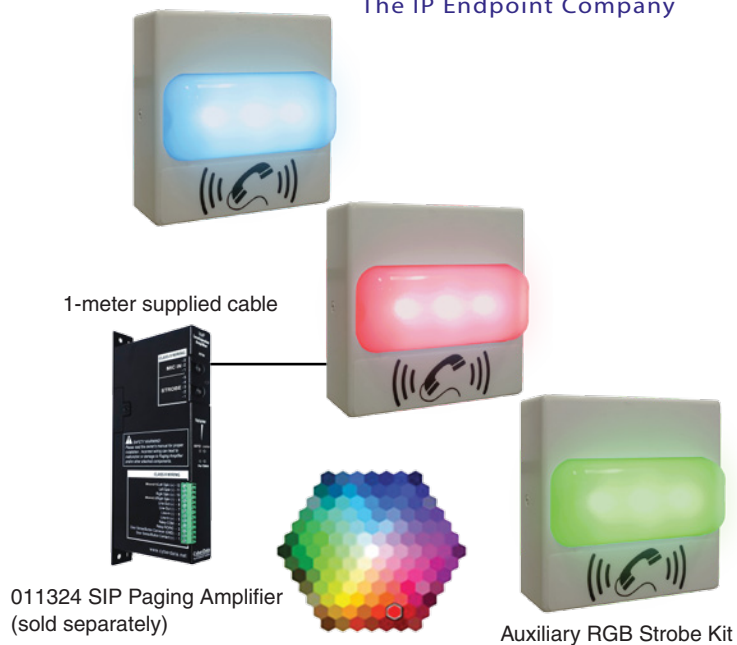


Specifications

Power Input	Supplied by the supported CyberData VoIP endpoint
Flash rate	4 scenes available
LED MTBF	100,000 Hours
Operating Temperature	-10° C to 50° C (14° F to 122° F)
Dimensions	Length: 5.0 in. [127 mm] Width: 1.5 in. [38.1mm] Height: 5.0 in. [127 mm]
Weight	1.0 lbs. (0.45 kg)
Boxed Weight	2.0 lbs. (0.90 kg)
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
Warranty	2 years limited
Part Number	011288

Auxiliary RGB Strobe Kit for CyberData IP Endpoints

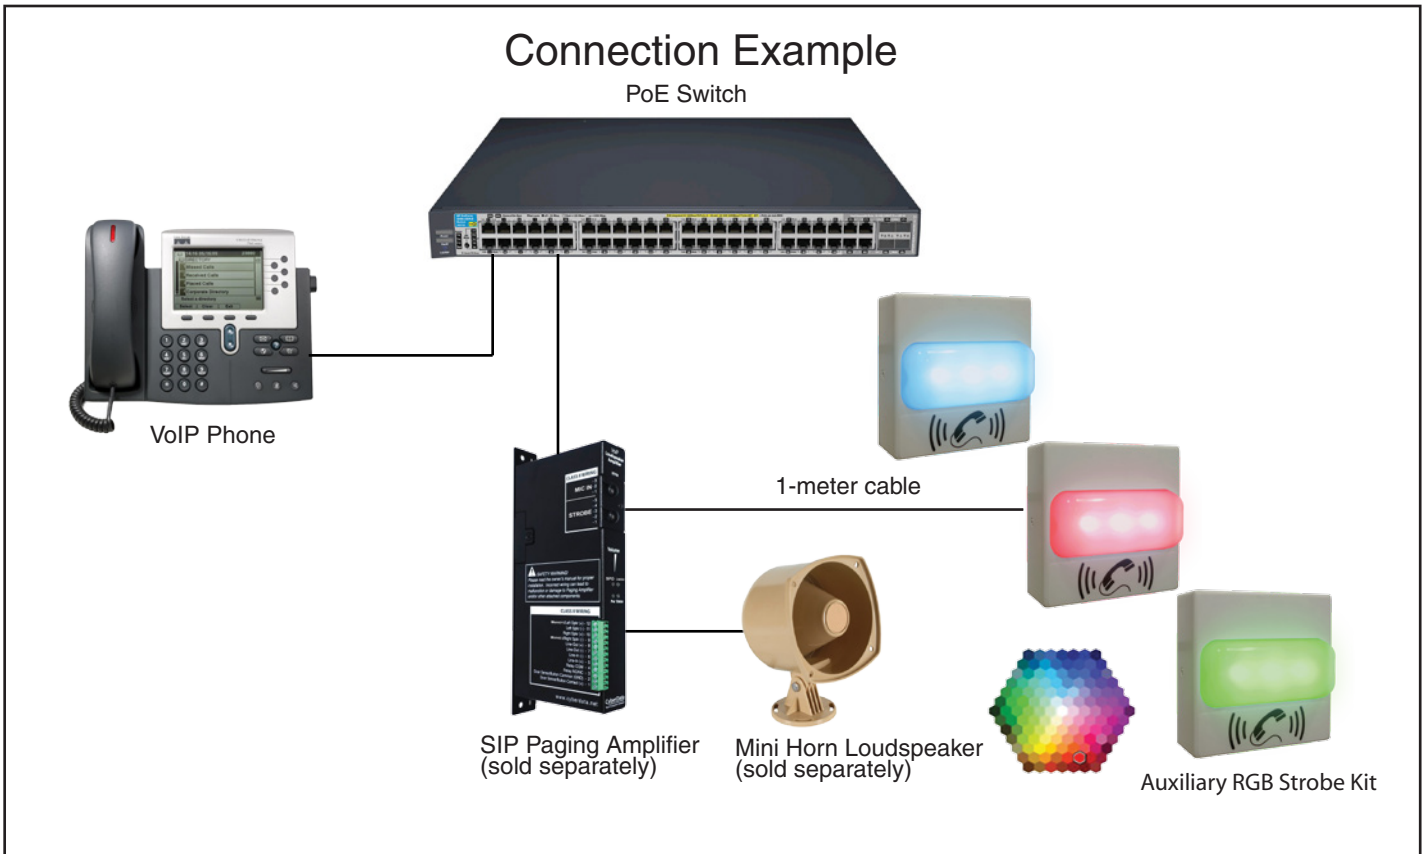


Strobe Kit Connections to the Paging Amplifier

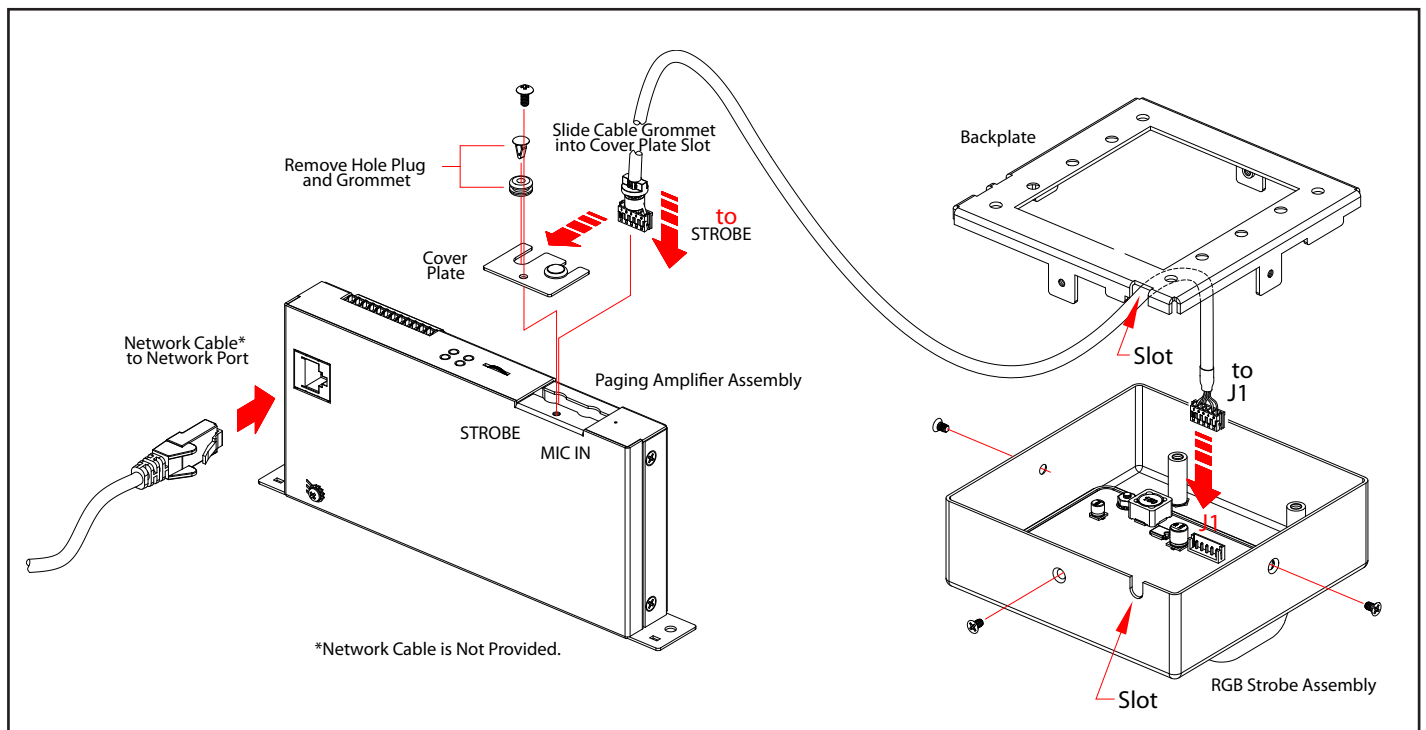

Auxiliary RGB Strobe Kit

for CyberData IP Endpoints

Strobe Kit Connections to the SIP Speaker

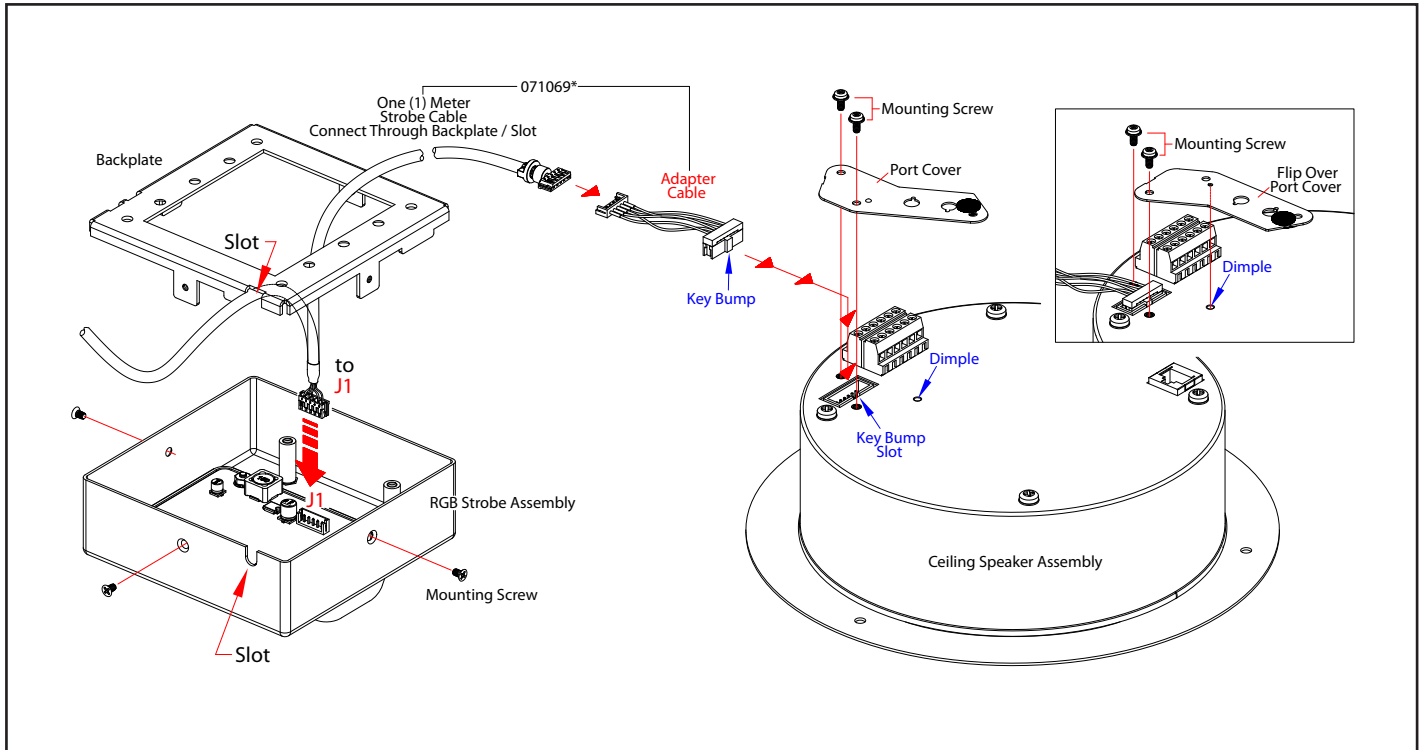

Cable from the Top through the Slot on the Faceplate

Cable from the Back through a Hole in a Wall

