

The CyberData InformaCast Enabled IP66 Outdoor Horn is for use with Singlewire's InformaCast paging and emergency notification software.

The Horn connects into local area networks with a single CAT5/6 cable from your PoE switch and provides an easy method for implementing a loud IP-based overhead paging system for loud areas, warehouses, manufacturing areas, and outdoor areas.



Features



- Compatible with Singlewire InformaCast v12.1, including support for downloading SIP credentials from InformaCast
- Supports Singlewire InformaCast High Quality Audio
- Simultaneous InformaCast, SIP and multicast
- Paging prioritization
- Support for 10 multicast paging groups
- User-uploadable ring and alert tones
- Support for security code to prevent unwanted SIP calls
- Can receive pages directly from Poly phones as well as other devices that can send standard multicast
- Loud/Night Ringer function - second SIP extension
- Delayed page support - buffer call
- Digital volume control
- Sealed network cable gland
- TLS 1.2 enhanced security for IP Endpoints in a local or cloud-based environment
- Autoprovisioning via HTTP, HTTPS, or TFTP
- HTTPS or HTTP web based configuration. HTTPS is enabled by default
- 802.11q VLAN tagging
- Configurable event generation for device health and status monitoring
- Web-based upgradeable firmware
- Support for multiple SIP servers for redundancy
- Support for Cisco SRST resiliency

Specifications


| | |
|-----------------------|--|
| Ethernet I/F | 10/100 Mbps |
| Protocol | SIP RFC 3261 Compatible |
| Notification Software | Singlewire InformaCast v4.0 and above |
| Power Input | PoE 802.3at or 802.3af |
| Audio Output | 802.3at: 107.7 (+/- 0.2) dBC @ 1M and 1kHz 802.3af: 104.8 (+/- 0.2) dBC @ 1M and 1kHz |
| Payload Types | G.711 a-law, G.711 μ-law, G.722, G.729 |
| Network Security | TLS/SSL 1.2 |
| IP Rating | IP66 |
| Operating Range | Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing |
| Storage Temperature | -40° C to 70° C (-40° F to 158° F) |
| Storage Altitude | Up to 15,000 ft. (4573 m) |
| Dimensions* | Length: 14.404 in. [366 mm] Width: 10.630 in. [270 mm] Height: 6.772 in. [172 mm] (without stand) Height: 9.291 in. [236 mm] (with stand) |
| Weight | 6.6 lbs. [3.00 kg] |
| Boxed Weight | 8.8 lbs. [3.99 kg] |
| Compliance | CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant |
| Warranty | 2 Years Limited |
| Part Number | 011472 |

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

InformaCast® Enabled IP66 Outdoor Horn

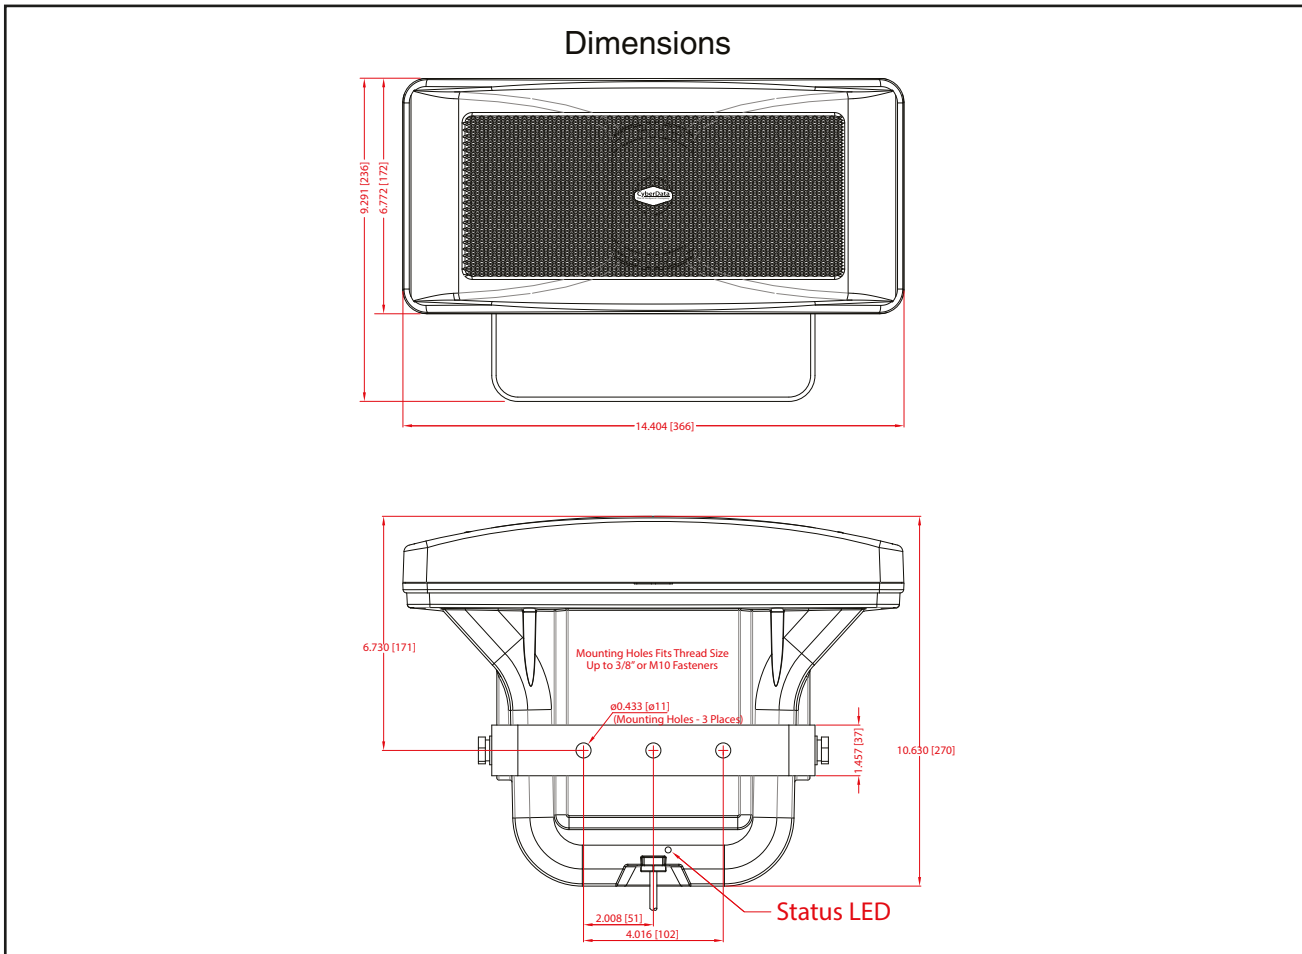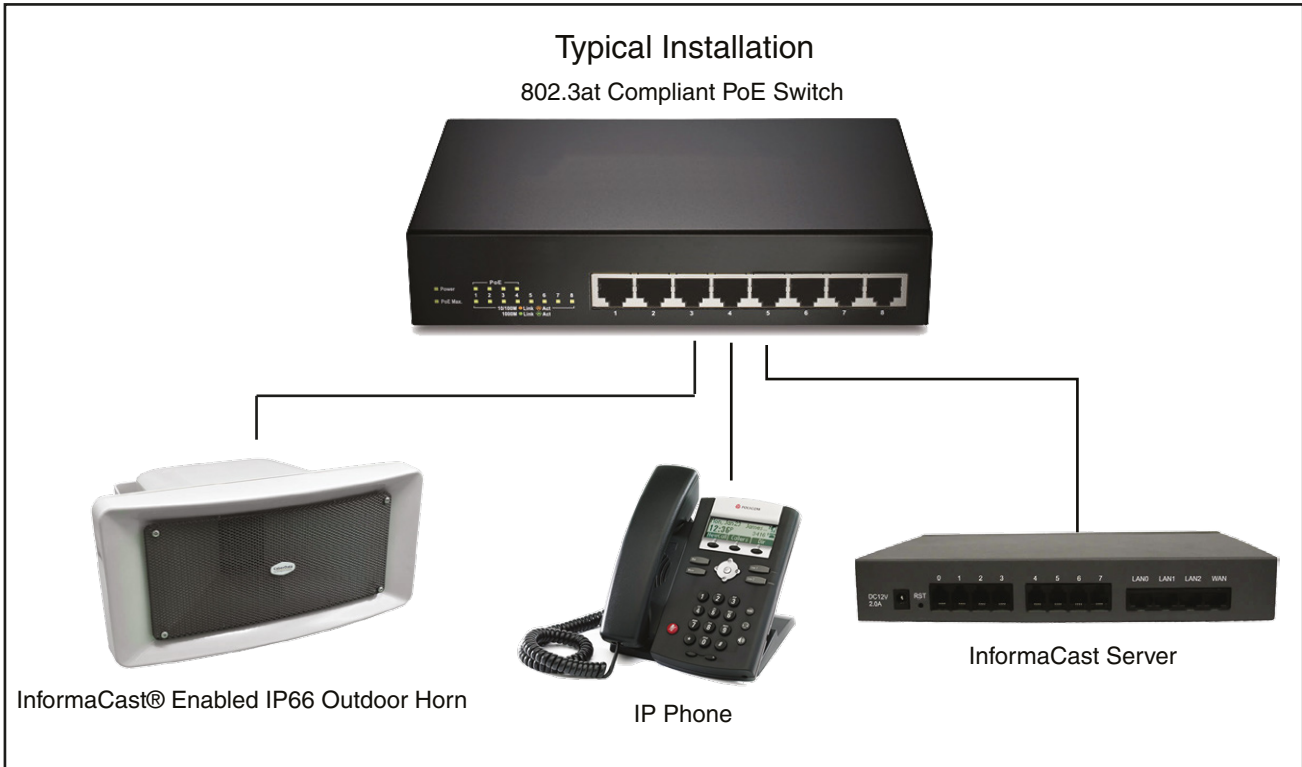

InformaCast® Enabled IP66 Outdoor Horn

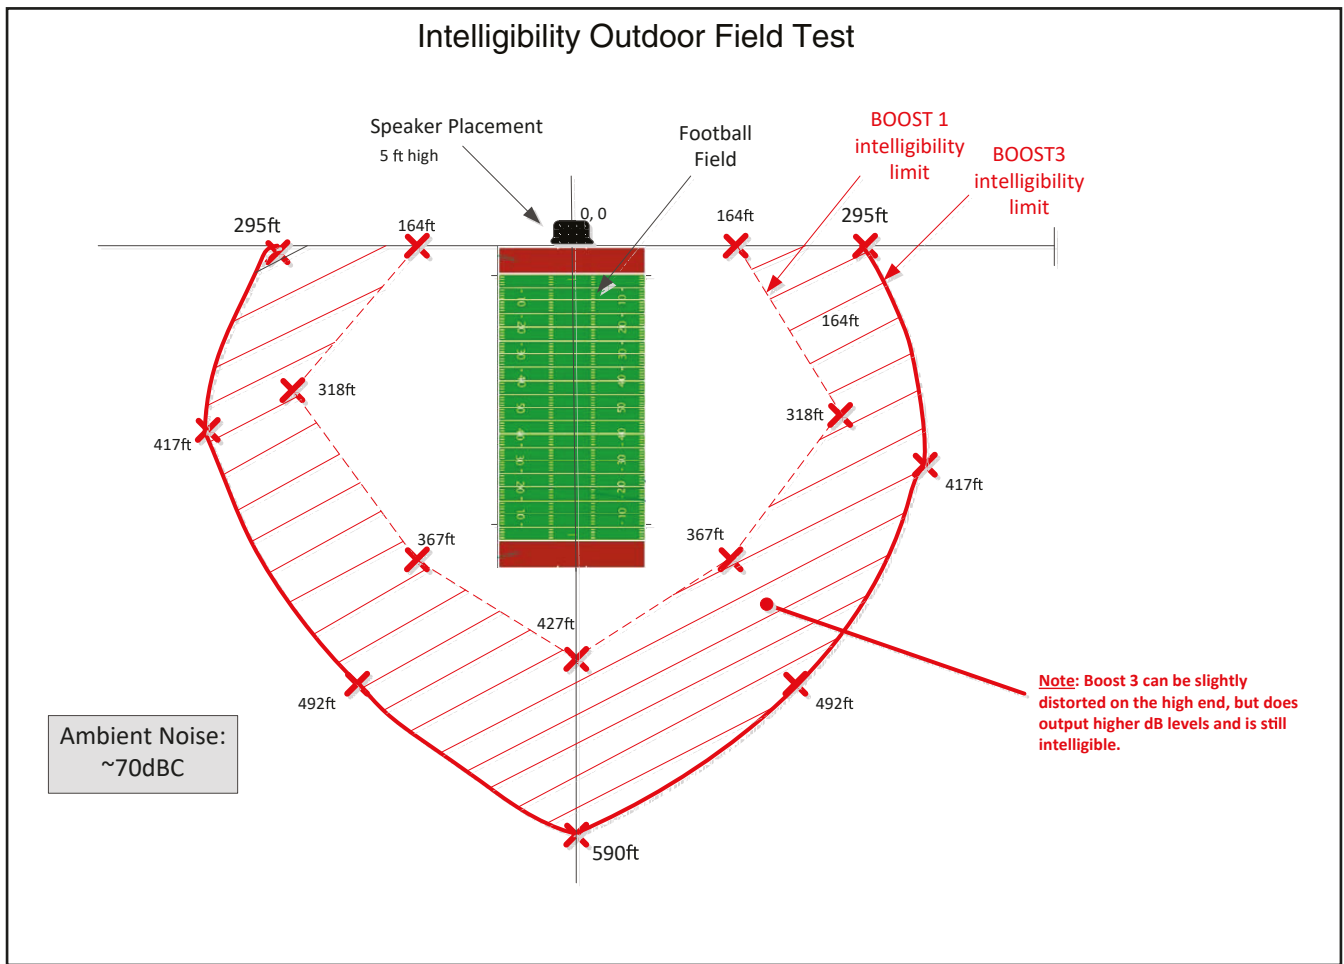

Related Products:



011489 InformaCast Enabled
Outdoor RGB (Multi-Color) Strobe



011407 InformaCast Enabled
Loudspeaker Amplifier (PoE)



011124 PoE Power
Injector 802.3at