

Outdoor SIP Intercom Decibel

The Handset Telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums, outside building etc.

Housed in cold rolled steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

Extremely easy to install. The cable entrance is on the back of the phone to prevent from artificial damage, while the keypad is weather and vandal resistant.



Features

- SIP telephone (RFC3261)
- Robust housing, constructed of cold rolled steel
- Vandal resistant metal button
- Hands free operation
- On wall mounting, simple installation
- Weather proof protection: up to IP55
- Single button autodial options with remote programming
- PoE (SIP)
- RJ45 Port for SIP connection
- CE, FCC, RoSH compliant

SIP-VoIP TECHNICAL SPECIFICATIONS

Port:

WAN: 10/100Base-T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base-T RJ-45 for PC, Auto MDIX

Power Consumption:

Idle:1.5W/ Active:1.8W

Main Chip:

Broadcom

NETWORK FEATURES

- **WAN/LAN:** support Bridge mode
- Support PPPoE for xDSL
- support VLAN
- Support Stun penetration
- Support DHCP get IP on WAN port

VOICE FEATURES

- Support 2 lines SIP, SIP 2.0 (RFC3261)
- **Codec:** G.711A/u, G.7231 high/low, G.729,G.722,G.726
- **Echo cancellation:** Support G.168 and hand-free can support 96ms.
- Supports full duplex.
- SIP support SIP domain, SIP authentication(none,basic,MD5), DNS name of server, peer to peer.
- SIP support 2 servers, user can through each server to calling in and out.

TECHNICAL SPECIFICATIONS

Casing Material

Cold rolled steel body

Colors

RED, YELLOW, GREY

Handset Material

No handset

Keypad

No keypad

Temperature

Operating: -30°C to +70°C

Storing: -40°C to +75°C

Weather Resistance

IP55

Ringtone

Shrill warble tone 80 dBA @ 1 metre
typical

Hook switch

Electronic / magnetic with no visible
moving parts


M.T.B.F.

Calculated to have an M.T.B.F. in excess
of 50,000 hours using

Weight

Up to 1 kg depending on option

INSTALLATION

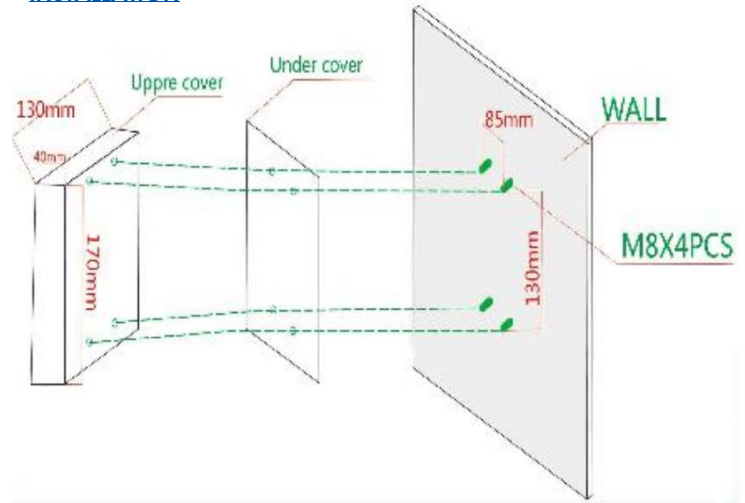

APPROVALS



This mark indicates compliance with the:
Radio & Telecommunications Terminal Equipment
Directive
2004/108/EC



This mark indicates compliance with the:
FCC Part 15 Subpart B Class B

PACKAGE

unit size: 170 *130 *60(mm)

Carton size: 200 *140 *100(mm)

Packaging materials: pearl cotton, carton

Net weight: 0.8KG

Gross weight: 1KG