

SIP Large Button Outdoor Intercom

CyberData

The IP Endpoint Company

The SIP Large Button Outdoor Intercom delivers two-way communication and secure access control for your VoIP phone system.

The call button's large, easy-to-activate design makes it ideal for settings such as entry to medical facilities or assisted living residences where the user's dexterity to ensure a precise contact with the button is limited – especially in emergency situations where time is critical.

The “easy press” is also optimal for drive-up entry to secure areas such as parking garages, warehouses, storage facilities, shipyards or other industrial environments where security is paramount.

CyberData's SIP enabled VoIP products are compatible with a vast majority of VoIP systems including SBCs, Gateways, and phone systems both on-premise or cloud-based.

Features

- Full duplex audio with enhanced acoustic echo cancelling
- Half duplex push-to-talk audio from the phone side using the phone's keypad or from the intercom side using the call button
- Simultaneous SIP and multicast
- Supports user-uploadable ring and alert tones
- Loud/Night Ringer function - second SIP extension
- Can receive pages directly from Poly phones as well as other devices that send standard multicast
- Large button for easy activation
- DTMF-controlled dry relay contact for auxiliary control
- Door closure and tamper alert signal
- Network volume control
- Supports Outdoor Auxiliary Strobe Kit for IP66-rated outdoor visual notification
- TLS 1.2 and SRTP enhanced security for IP endpoints in a local or cloud-based environment
- Autoprovisioning via HTTP, HTTPS, or TFTP
- HTTPS web-based configuration
- Configurable event generation for device health and status monitoring
- 802.11q VLAN tagging
- Support for Cisco SRST resiliency








Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Audio Output (Max) Power Rating (Max)	802.3af: 86dB @ 1 meter 802.3af: 5-Watts
On-Board Relay	1A @ 30 VDC
Payload Types	G.711 a-law, G.711μ-law, G.722, and G.729
Network Security	TLS 1.2, SRTP, HTTPS
IP Rating	IP65
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature Storage Altitude	Temperature: -40° C to 70° C (-40° F to 158° F) Up to 15,000 ft. (4573 m)
Dimensions*	5.118 inches [130 mm] Length 2.252 inches [57.21 mm] Width 5.118 inches [130 mm] Height
Weight Boxed Weight	2.0 lbs. [0.90 kg] 3.0 lbs. [1.36 kg]
Compliance	CE: EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive EN 62368-1; RoHS Compliant; FCC Part 15 Class; Industry Canada ICES-3 Class A; IEEE 802.3 Compliant; TAA Compliant
Warranty	5 Years Limited
Part Number	011567

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

SIP Large Button Outdoor Intercom

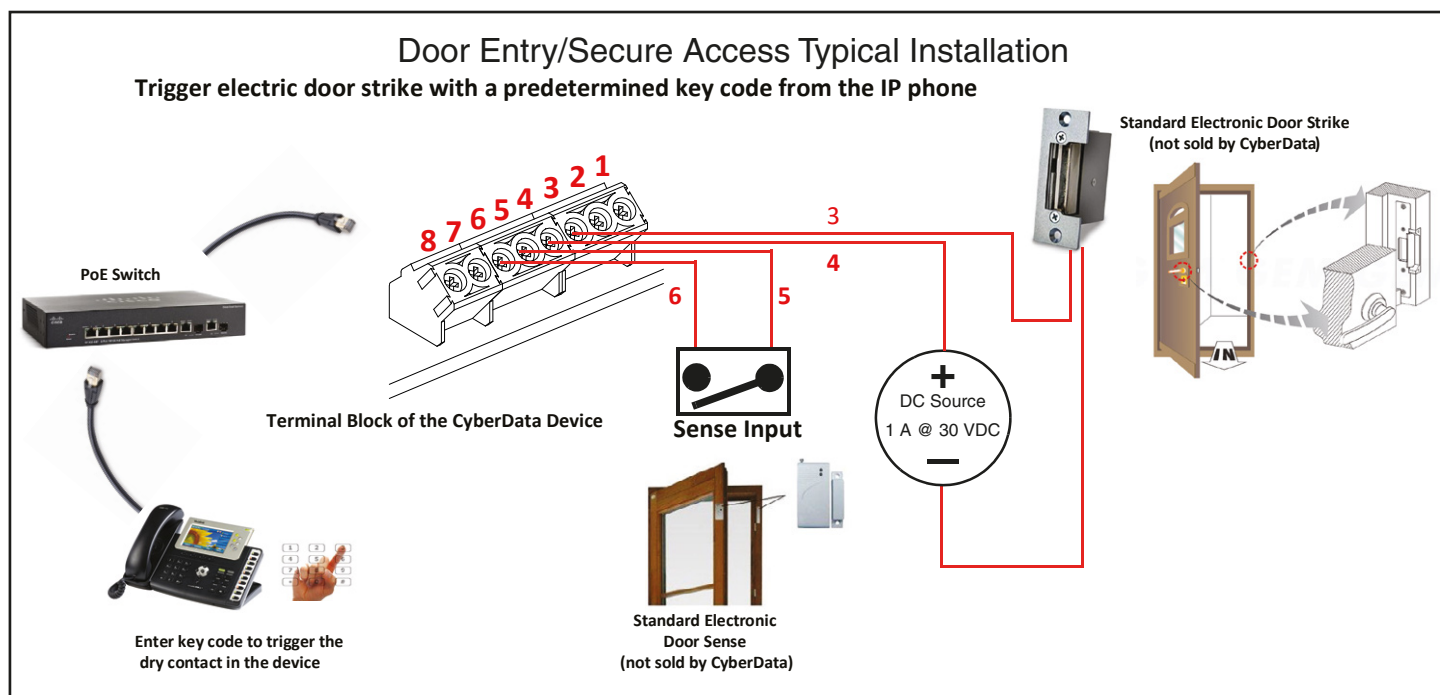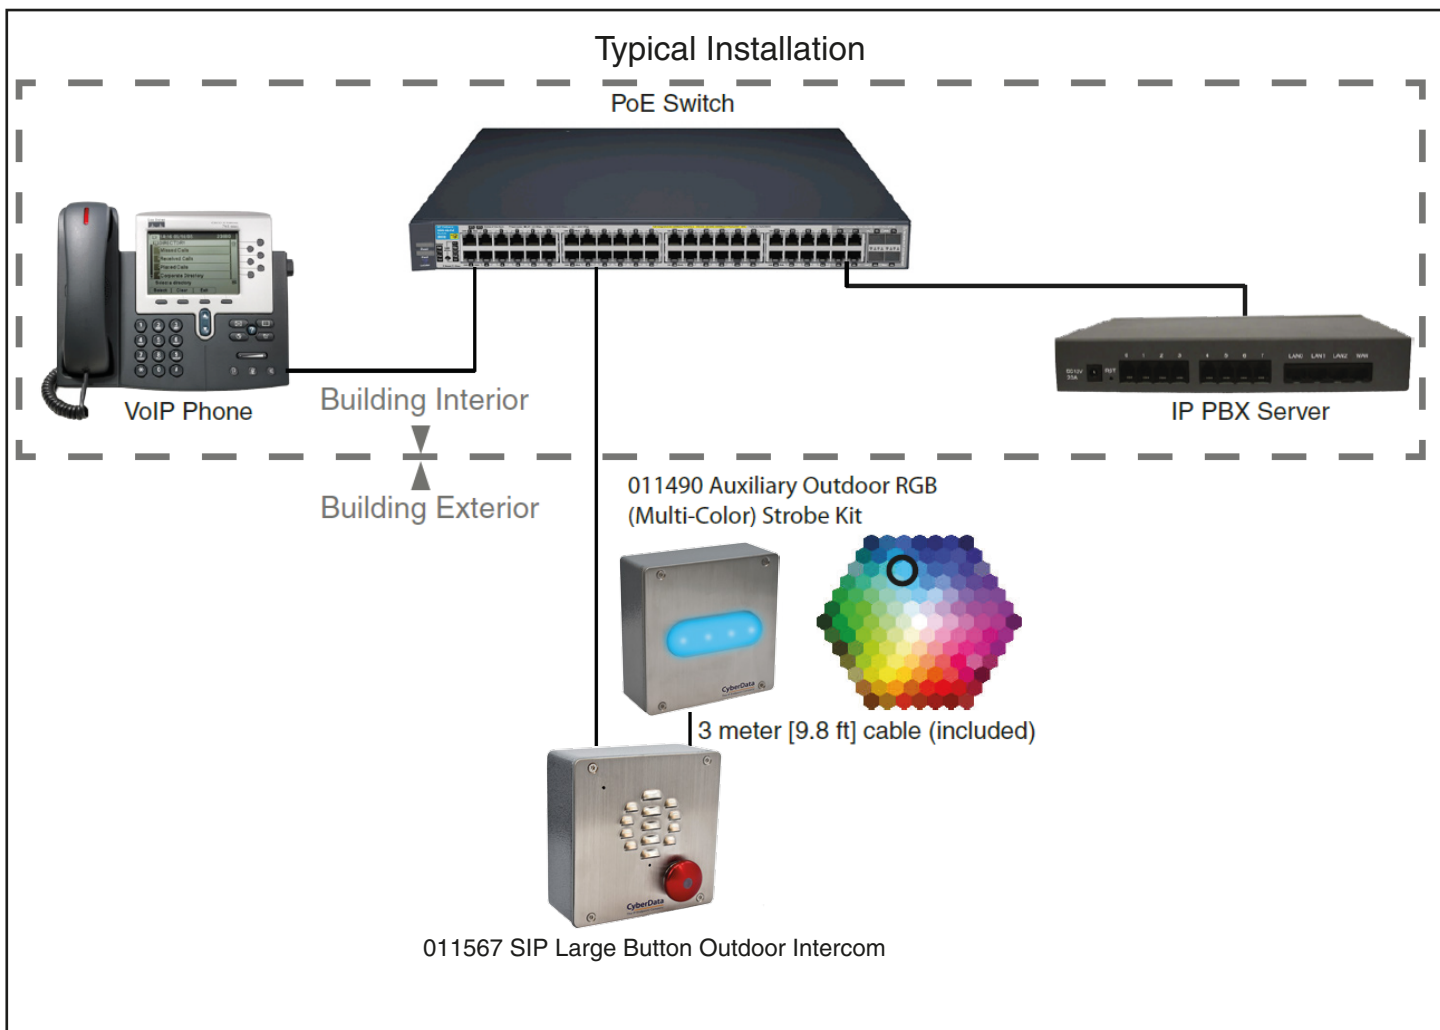

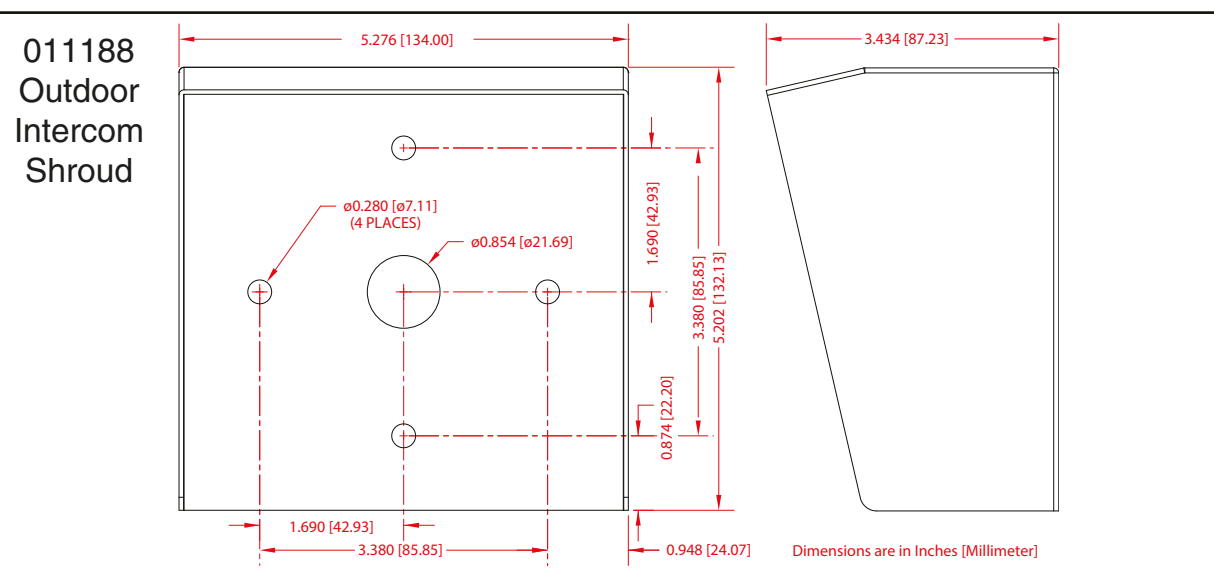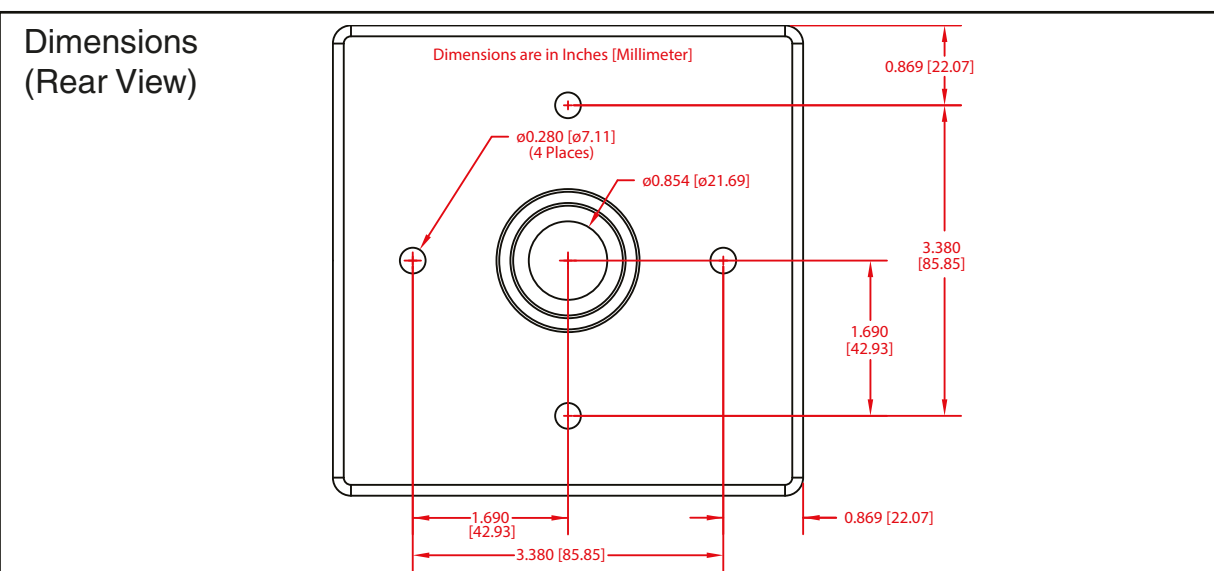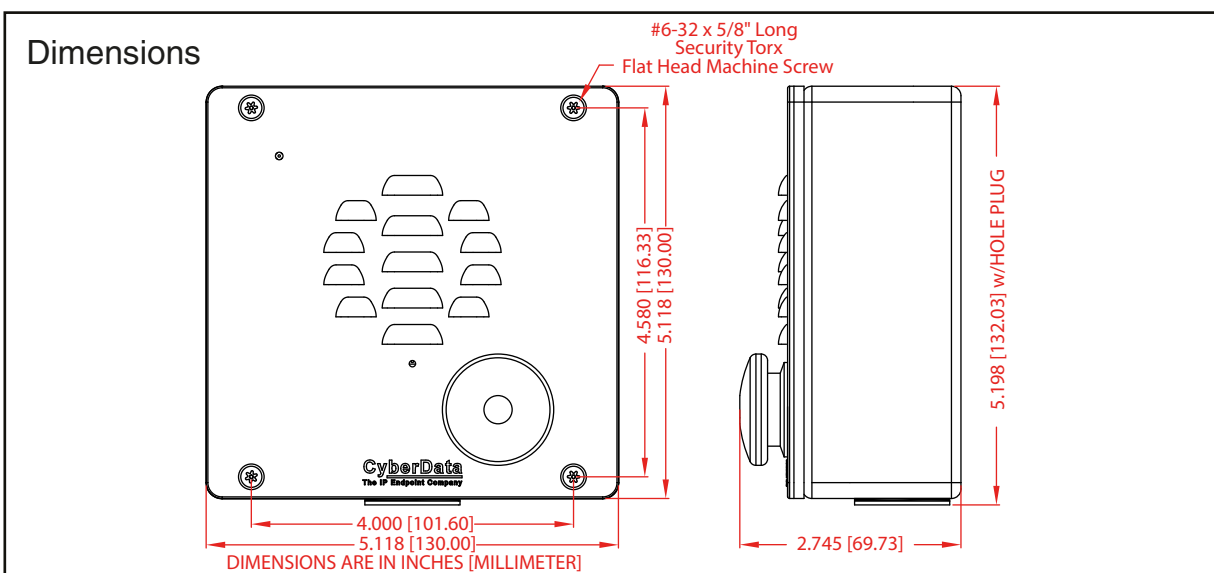

SIP Large Button Outdoor Intercom

Related Products:



011375 Network Dual
Door Strike Relay




011269 Door Strike
Intermediate Relay Module



011490 Outdoor Auxiliary RGB
(Multi-Color) Strobe Kit



011188 Outdoor
Intercom Shroud



011443 Flush Mount Kit, 1X