


### *Premium Add-on device for your home*

The scene panel can be easily configured to associate various switch loads, dimming devices, and smart scenes, achieving intelligent quick control to meet the diverse needs of users. This series of panels offer 2/4/6/8 key options, with a simple and intuitive design. As an advanced smart keypad panel, this series aims to bring a higher level of convenience and intelligence control to modern homes.

### *Features*


- Compatible with actuators to achieve functions such as switching, dimming, color adjustment, and blind control.
- Support scene calling and storage function.
- Delayed transmission of values (such as switch value, dimming value).
- Support multiple operations with a single button.

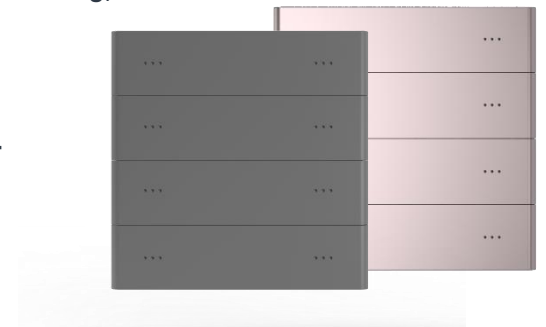

### Specification

- Model Number: KXKS-B1B2-EU;KXKS-B1B4-EU;KXKS-B1B6-EU;KXKS-B1B8-EU
- Working Voltage: 21-30V DC
- Auxiliary Voltage: 21V-30V DC
- Working Current: <12mA
- Standby Power: <360mW
- Working Temperature: -5 ~ 45°C
- Protection Level: IP20
- Working Humidity: <93%RH, non-condensing
- Installation Method: Standard 60mm installation box
- Dimensions: 86×86×38.2mm
- Weight: 0.15kg

## Wiring Diagram

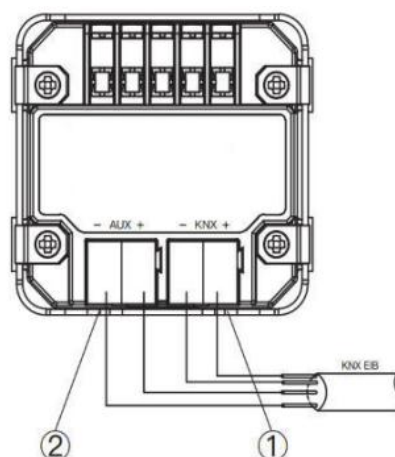

- ① **KNX/EIB bus terminal**
- ② **Auxiliary power supply connection terminal**

## Installation Notes

This unit is suitable for installation in a conventional 60 square box. The depth of the junction box is at least 50mm. Where panels are available , 70mm is recommended, depending on the actual wiring connections. The installation must be carried out in such a way that the equipment is operated, tested, inspected, maintained and repaired correctly.