


Product Introduction

This scene panel matches the style of the existing switch series. It integrates with the gateway via standard ZigBee protocol, enabling one-touch control of scenes or devices, offering users a convenient smart home management experience.

Features


- Smooth, fingerprint-resistant AG glass
- Support scene or device linkage
- Available in 2 colors, with the option of 4/6 buttons
- Compatible with standard EU electrical boxes
- Wide voltage range for broad applications

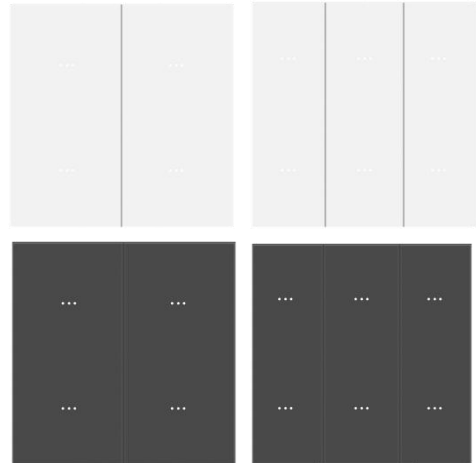

Specification

- Product Model: SM-4S/SM-6S
- Input Voltage: 100-250VAC /50~60Hz
- Communication Protocol: ZigBee 3.0
- Button Indicator: White (On) / Orange (Off)
- Working Temperature: -10°C ~ 60°C
- Working Humidity: 0 ~ 95% (Non-condensing)
- Service Life: $\geq 100,000$ operations
- Cable Cross-sectional Range: 1-4mm²(recommended)
- Certification: CE

Wiring Diagram

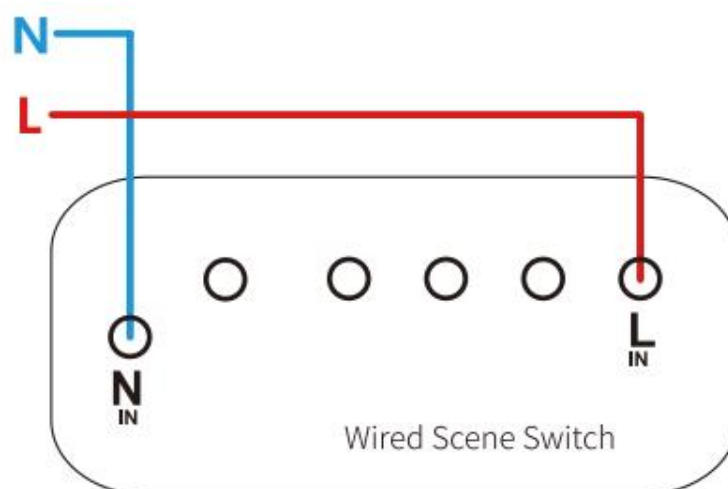

Networking Method

1. Connect the power supply according to the wiring diagram to power the device.
2. Press and hold any button for about 10 seconds until the indicator flashes quickly, indicating that it has entered pairing mode.
3. Add the device to the network through a gateway device.