

# InformaCast® Enabled Office Ringer

# CyberData

The IP Endpoint Company

The CyberData InformaCast Enabled Office Ringer is a true SIP endpoint that can also receive Singlewire InformaCast notifications. Perfect for small offices or cubicles with its distinct ring tone, the Office Ringer is a Power-over-Ethernet (PoE 802.3af) and Voice-over-IP (VoIP) notification device that easily connects into existing local area networks (LANs) with a single cable connection.

The InformaCast Enabled Office Ringer provides an audible ring indication when part of a ring group. The Office Ringer also supports direct SIP voice paging and priority-based Multicast paging.

## InformaCast Features

- Capable of receiving Singlewire InformaCast notification messages
- Compatible with Singlewire InformaCast v12.1, including support for downloading SIP credentials from InformaCast
- Supports Singlewire InformaCast High Quality Audio

## Standard Features

- Concurrent SIP and multicast paging
- Custom alerts, ringtones and callout messages may be uploaded
- Dry relay contact for auxiliary control
- Door closure and tamper alert signal
- Drywall mounting
- Streamlined case design
- Compatible with Cisco Call Manager
- Supports SRST (Survivable Remote Site Telephony) in a Cisco environment
- TLS 1.2 enhanced security for IP Endpoints in a local or cloud-based environment
- Network web management and firmware download
- Network adjustable speaker volume

## Related Products:



011280 InformaCast Enabled Paging Adapter



011288 Auxiliary RGB (Multi-Color) Strobe Kit



011396 InformaCast Enabled Speaker



011472 InformaCast Enabled IP66 Outdoor Horn




## Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Notification Software	Singlewire InformaCast v4.0 and above
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Speaker Output	2 Watts Peak Power
On-Board Relay	1A @ 30 VDC
Payload Types	G.711 a-law, G.711 $\mu$ -law, G.722, and G.729
Network Security	TLS/SSL 1.2
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	Temperature: -40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	4.53 inches [115 mm] Length 2.14 inches [54.3 mm] Width 4.53 inches [115 mm] Height
Weight	1.0 lbs. [0.45 kg]
Boxed Weight	2.0 lbs. [0.90 kg]
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
Warranty	2 years limited
Part Number	011311

\*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

# InformaCast® Enabled Office Ringer

## Typical Installation - Auxiliary RGB (Multi-Color) Strobe Kit

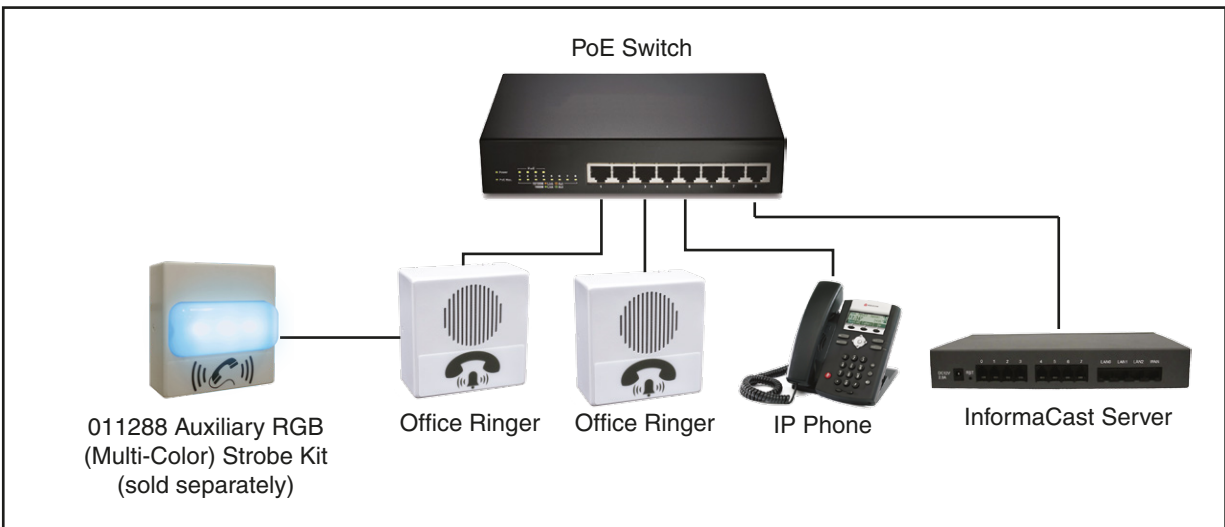

## Dimensions

