

SIP Loudspeaker Amplifier (AC-Powered)

CyberData

The IP Endpoint Company

The new CyberData SIP-enabled Loudspeaker Amplifier (AC-Powered) provides an easy method for implementing a loud IP-based overhead paging system for loud areas, warehouses, manufacturing areas, and outdoor areas.

Now with up to 9 user-stored messages, the Amplifier provides direct drive of up to two 8 Ohm horns.

The interface is compatible with most SIP-based IP PBX servers that comply with the SIP RFC 3261. For non-SIP environments, the Loudspeaker Amplifier can be configured to listen to multicast address and port number combinations to form paging zones.

Can receive pages directly from Polycom phones

New Features

- SIP Enhanced interoperability for hosted environments
–CyberData has maintained one of the most comprehensive list of IP PBX servers certified to work with CyberData
- NEW SECURITY FEATURES:
 - Support for security code access for SIP paging
 - Autoprovisioning via HTTPS
 - HTTPS web based configuration
- Support for G.722 codecs
- 802.11q VLAN tagging
- Configurable sense input for use with fault detection
- Configurable event generation for device health and status monitoring
- Optional direct connect RGB strobe kit connection
- 9 user-uploadable page messages

Features

- Packaged in a NEMA 3/3x (IP55)-rated enclosure
- SIP and Simultaneous Multicast
- Page to Polycom phones
- Dual-speed ethernet 10/100 Mbps
- Web-based configuration
- PoE 802.3at and 802.3af-enabled
- Line-in for background music
- Line-out connector
- DTMF controlled relay
- Direct 8 Ohm speaker drive
- User-uploadable tones and messages
- Digital and manual volume control
- Second SIP endpoint "Night Ringer"
- Autoprovisioning
- Auto-call voice message from input port sense
- Can support two horns
- HTTP Command Interface
- 10 channel prioritized Multicast ports
- Built-in diagnostics
- Delayed page support
- Cisco SRST



Mini Horn Loudspeaker (part #011068) must be purchased separately.

Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3at or 802.3af
Audio Output	802.3at - SPL 117 dB @ 1 meter*

Line In:

Input Signal Amplitudes	2.0 VPP maximum
Input Impedance	10k Ohm

Line Out:

Output Signal Amplitudes	2.0 VPP maximum
Output Level	+2dBm nominal
Total Harmonic Distortion	0.5% maximum
Output Impedance	10k Ohm

Operating Range (with NEMA enclosure)	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing Enclosure: NEMA3/3X (IP55 rated)
---------------------------------------	------------------------------------------------------------------------------------------------------------------------

Storage Temperature	Temperature: -40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)

Payload Types	G.711 a-law, G.711 μ -law, and G.722
Dimensions**	10 in. [254 mm] Length 4 in. [101.6 mm] Width 14 in. [355.6 mm] Height

Boxed Weight	6.5 lbs. [2.95 kg]
--------------	--------------------

Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Warranty	2 Years Limited
----------	-----------------




Part Number	011404
-------------	--------

Mini Horn Loudspeaker	011068
-----------------------	--------

*When used with the 011068 Mini Horn.

**Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

SIP Loudspeaker Amplifier (AC-Powered)

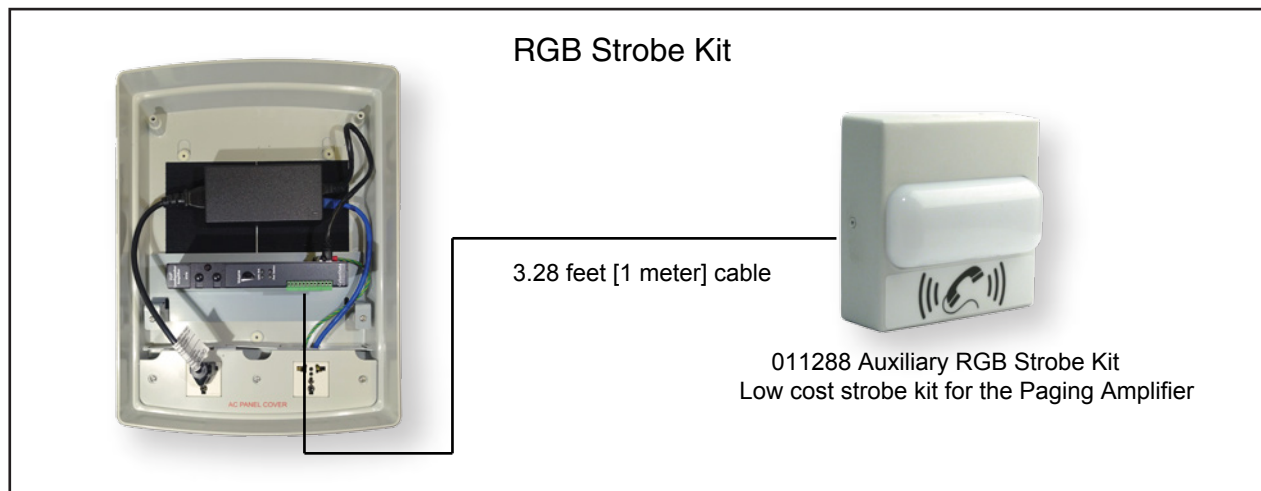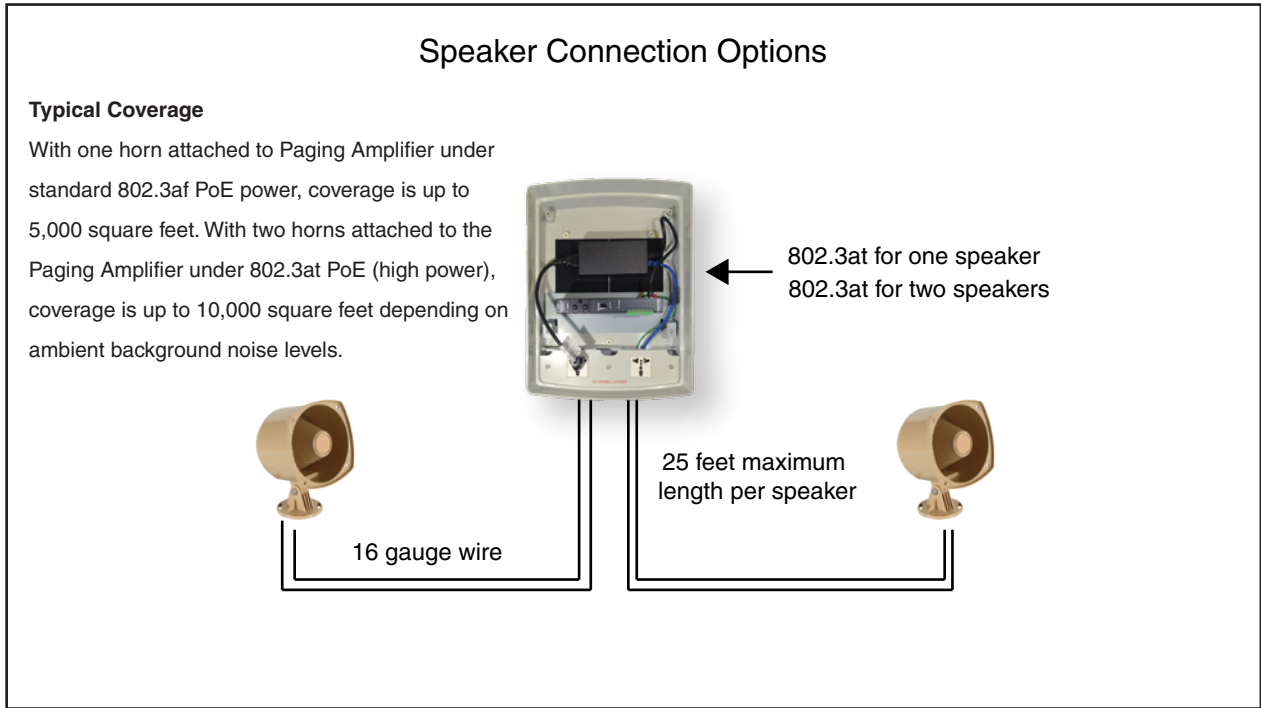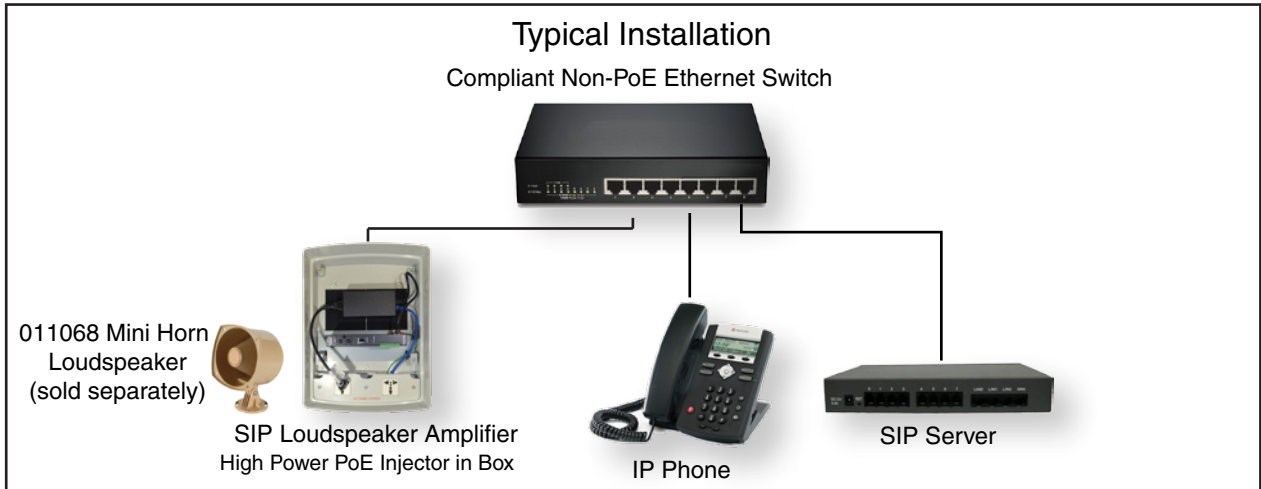

SIP Loudspeaker Amplifier (AC-Powered)

Upload an Audio Message

User can upload an audio message to the device.

When the "Sense-In" is activated, the stored audio file will play out the local speaker and repeat until the condition is cleared.

The device can also call a pre-set phone number and when that phone answers, the stored audio message will also be played to the phone.



IP Phone



Window Reed switch is connected to the "Sense-In" connection.

Window Reed Switch
(Not a CyberData device. Sold separately)